






## Circuit-breaker, 3 p, 1000A


Part no. **LZMN4-AE1000-I**  
 Article no. **111979**

Similar to illustration

## Delivery programme

Product range			Circuit-breaker
Protective function			System and cable protection
Standard/Approval			IEC
Installation type			Fixed
Release system			Electronic release
Construction size			LZM4
Description			R.m.s. value measurement and "thermal memory"
Number of poles			3 pole
Standard equipment			Screw connection
<b>Switching capacity</b>			
400/415 V 50/60 Hz	$I_{cu}$	kA	50
<b>Rated current = rated uninterrupted current</b>			
Rated current = rated uninterrupted current	$I_n = I_u$	A	1000
<b>Setting range</b>			
Overload trip			
	$I_r$	A	500 - 1000
Short-circuit releases			
			
Non-delayed	$I_i = I_n \times \dots$		2 - 12
			


## Technical data

<b>General</b>			
Standards			IEC/EN 60947, VDE 0660
Protection against direct contact			Finger and back-of-hand proof to VDE 0106 part 100
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27		g	15 (half-sinusoidal shock 11 ms)
Safe isolation to EN 61140			
Between auxiliary contacts and main contacts		V AC	500
between the auxiliary contacts		V AC	300
Weight		kg	21
Mounting position			Vertical and 90° in all directions
			 <p>With XFI earth-fault release:</p> <ul style="list-style-type: none"> <li>- NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit</li> <li>- NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit:</li> <li>- NZM3, N3: vertical, 90° left</li> <li>- NZM4, N4: vertical with remote operator:</li> </ul>

- NZM2, N(S)2, NZM3, N(S)3,  
NZM4, N(S)4: vertical and 90° in all  
directions


Direction of incoming supply			as required
Degree of protection			
Device			In the area of the HMI devices: IP20 (basic protection type)
Enclosures			with insulating surround: IP40 with door coupling rotary handle: IP66
Terminations			Tunnel terminal: IP10 Phase isolator and band terminal: IP00

### Circuit-breakers

Rated current = rated uninterrupted current	$I_n = I_u$	A	1000
Rated surge voltage invariability	$U_{imp}$		
Main contacts		V	8000
Auxiliary contacts		V	6000
Rated operational voltage	$U_e$	V AC	690
Overvoltage category/pollution degree			III/3
Rated insulation voltage	$U_i$	V	1000
Use in unearthed supply systems		V	 525

### Switching capacity

Rated short-circuit making capacity	$I_{cm}$		
240 V 50/60 Hz	$I_{cm}$	kA	105
400/415 V 50/60 Hz	$I_{cm}$	kA	105
440 V 50/60 Hz	$I_{cm}$	kA	74
525 V 50/60 Hz	$I_{cm}$	kA	53
690 V 50/60 Hz	$I_c$	kA	40
Rated short-circuit breaking capacity $I_{cn}$	$I_{cn}$		
$I_{cu}$ to IEC/EN 60947 test cycle O-t-CO	$I_{cu}$	kA	
240 V 50/60 Hz	$I_{cu}$	kA	50
400/415 V 50/60 Hz	$I_{cu}$	kA	50
440 V 50/60 Hz	$I_{cu}$	kA	35
525 V 50/60 Hz	$I_{cu}$	kA	25
690 V 50/60 Hz	$I_{cu}$	kA	20
$I_{cs}$ to IEC/EN 60947 test cycle O-t-CO-t-CO	$I_{cs}$	kA	
230 V 50/60 Hz	$I_{cs}$	kA	37
400/415 V 50/60 Hz	$I_{cs}$	kA	37
440 V 50/60 Hz	$I_{cs}$	kA	26
525 V 50/60 Hz	$I_{cs}$	kA	19
690 V 50/60 Hz	$I_{cs}$	kA	15
Rated short-time withstand current			Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.
$t = 0.3$ s	$I_{cw}$	kA	19.2
$t = 1$ s	$I_{cw}$	kA	19.2
Utilization category to IEC/EN 60947-2			B (2000A: A)
Rated making and breaking capacity			
Rated operational current	$I_e$	A	
AC-1			
380 V 400 V	$I_e$	A	2000
415 V	$I_e$	A	1600
690 V	$I_e$	A	2000
AC--3			
380 V 400 V	$I_e$	A	1000
415 V	$I_e$	A	1000
660 V 690 V	$I_e$	A	1000

			For AC--3 rated operational current with NZM4 the following applies: 400 V: max. 650 kW; 690 V: max. 600 kW
Lifespan, mechanical	Operations		10000
Lifespan, electrical			
AC-1			
400 V 50/60 Hz	Operations		3000
415 V 50/60 Hz	Operations		3000
690 V 50/60 Hz	Operations		2000
AC-2, AC-3			
400 V 50/60 Hz	Operations		2000
415 V 50/60 Hz	Operations		2000
690 V 50/60 Hz	Operations		1000
Max. operating frequency		Ops/h	60
Current heat losses per pole at I <sub>u</sub> are based on the maximum rated operational current of the frame size.		W	97
			For current heat loss per pole the specification refers to the maximum rated operational current of the frame size.
Total downtime in a short-circuit		ms	< 25  415 V; < 35 > 415 V

## Terminal capacity

Standard equipment			Screw connection																																			
Overview			<p>Basic equipment</p> <table border="0"> <tr> <td>Box terminal</td> <td>●</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>Screw connection</td> <td>-</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table> <p>accessory consideration</p> <table border="0"> <tr> <td>Box terminals</td> <td>-</td> <td>●</td> <td>●</td> <td>-</td> </tr> <tr> <td>Screw connection</td> <td>●</td> <td>-</td> <td>-</td> <td>●</td> </tr> <tr> <td>Tunnel terminal connection</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>connection on rear</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>Strip terminal</td> <td>-</td> <td>-</td> <td>-</td> <td>●</td> </tr> </table>	Box terminal	●	-	-	-	Screw connection	-	●	●	●	Box terminals	-	●	●	-	Screw connection	●	-	-	●	Tunnel terminal connection	●	●	●	●	connection on rear	●	●	●	●	Strip terminal	-	-	-	●
Box terminal	●	-	-	-																																		
Screw connection	-	●	●	●																																		
Box terminals	-	●	●	-																																		
Screw connection	●	-	-	●																																		
Tunnel terminal connection	●	●	●	●																																		
connection on rear	●	●	●	●																																		
Strip terminal	-	-	-	●																																		
Round copper conductor																																						
Tunnel terminal																																						
Stranded		mm <sup>2</sup>																																				
4-hole		mm <sup>2</sup>	4 x (50 - 240)																																			
Bolt terminal and rear-side connection																																						
Direct on the switch																																						
Stranded		mm <sup>2</sup>	1 x (120 - 185) 4 x (50 - 185)																																			
Module plate																																						
Single hole	min.	mm <sup>2</sup>	1 x (120 - 300)																																			
Single hole	max.	mm <sup>2</sup>	2 x (95 - 300)																																			
Module plate																																						
Double hole	min.	mm <sup>2</sup>	2 x (95 - 185)																																			
Double hole	max.	mm <sup>2</sup>	4 x (35 - 185)																																			
Connection width extension		mm <sup>2</sup>																																				
Connection width extension		mm <sup>2</sup>	4 x 300 6 x (95 - 240)																																			
Al conductors, Cu cable																																						
Stranded		mm <sup>2</sup>																																				
4-hole		mm <sup>2</sup>	4 x (50 - 240)																																			
Bolt terminal and rear-side connection																																						
Flat copper strip, with holes	min.	mm	(2 x) 10 x 50 x 1.0																																			
Flat copper strip, with holes	max.	mm	(2 x) 10 x 50 x 1.0																																			

Connection width extension		mm <sup>2</sup>	(2 x) 10 x 80 x 1.0
Cu strip (number of segments x width x segment thickness)			
Flat conductor terminal			
	min.	mm	6 x 16 x 0.8
	max.	mm	(2 x) 10 x 32 x 1.0
Module plate			
Single hole		mm <sup>2</sup>	(2 x) 10 x 50 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	(2 x) 10 x 50 x 1.0
Flat copper strip, with holes	max.	mm	(2 x) 10 x 50 x 1.0
Connection width extension		mm <sup>2</sup>	(2 x) 10 x 80 x 1.0
Copper busbar (width x thickness)		mm	
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm <sup>2</sup>	25 x 5
	max.	mm <sup>2</sup>	2 x (50 x 10) 2 x (80 x 10)
Module plate			
Single hole	min.	mm <sup>2</sup>	25 x 5
Single hole	max.	mm <sup>2</sup>	2 x (50 x 10)
Module plate			
Double hole		mm <sup>2</sup>	2 x (50 x 10)
Connection width extension		mm <sup>2</sup>	
Connection width extension	min.	mm <sup>2</sup>	60 x 10
Connection width extension	max.	mm <sup>2</sup>	2 x (80 x 10)
Control cables			
		mm <sup>2</sup>	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)

## Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	1000
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	174
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.

10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 5.0


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation prot. (EC000228)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss8-27-37-04-09 [AJZ716009])		
Rated permanent current I <sub>u</sub>	A	1000
Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz	kA	50
Setting range overload protector	A	500 - 1000
Adjustment range short-term delayed short-circuit release	A	0 - 0
Adjustment range undelayed short-circuit release	A	2000 - 12000
Integrated earth fault protection		No
Connection type main current circuit		Screw connection
Device construction		Built-in device fixed built-in technique
Suitable for DIN rail (top hat rail) mounting		No
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Switched-off indicator available		No
With under voltage release		No
Number of poles		3
Position of connection for main current circuit		Front connection
Type of control element		Rocker lever
Motor drive optional		Yes
Motor drive integrated		No
Degree of protection (IP)		IP20


# Characteristics

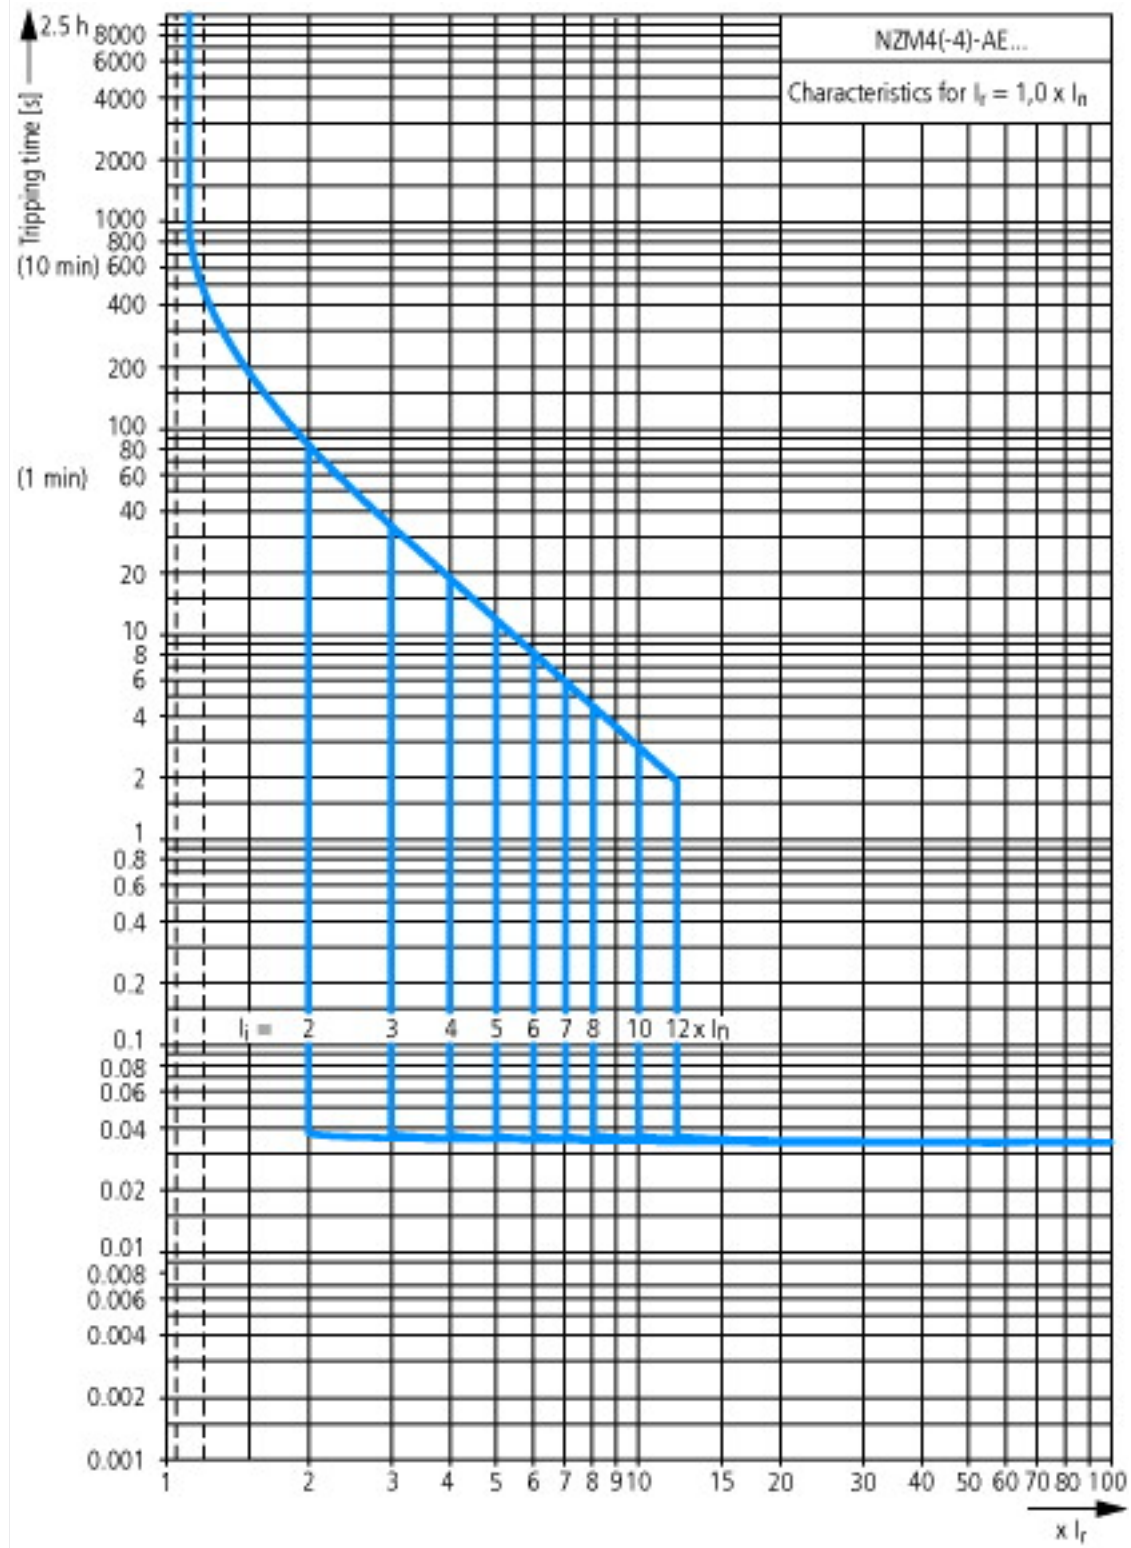

## Dimensions

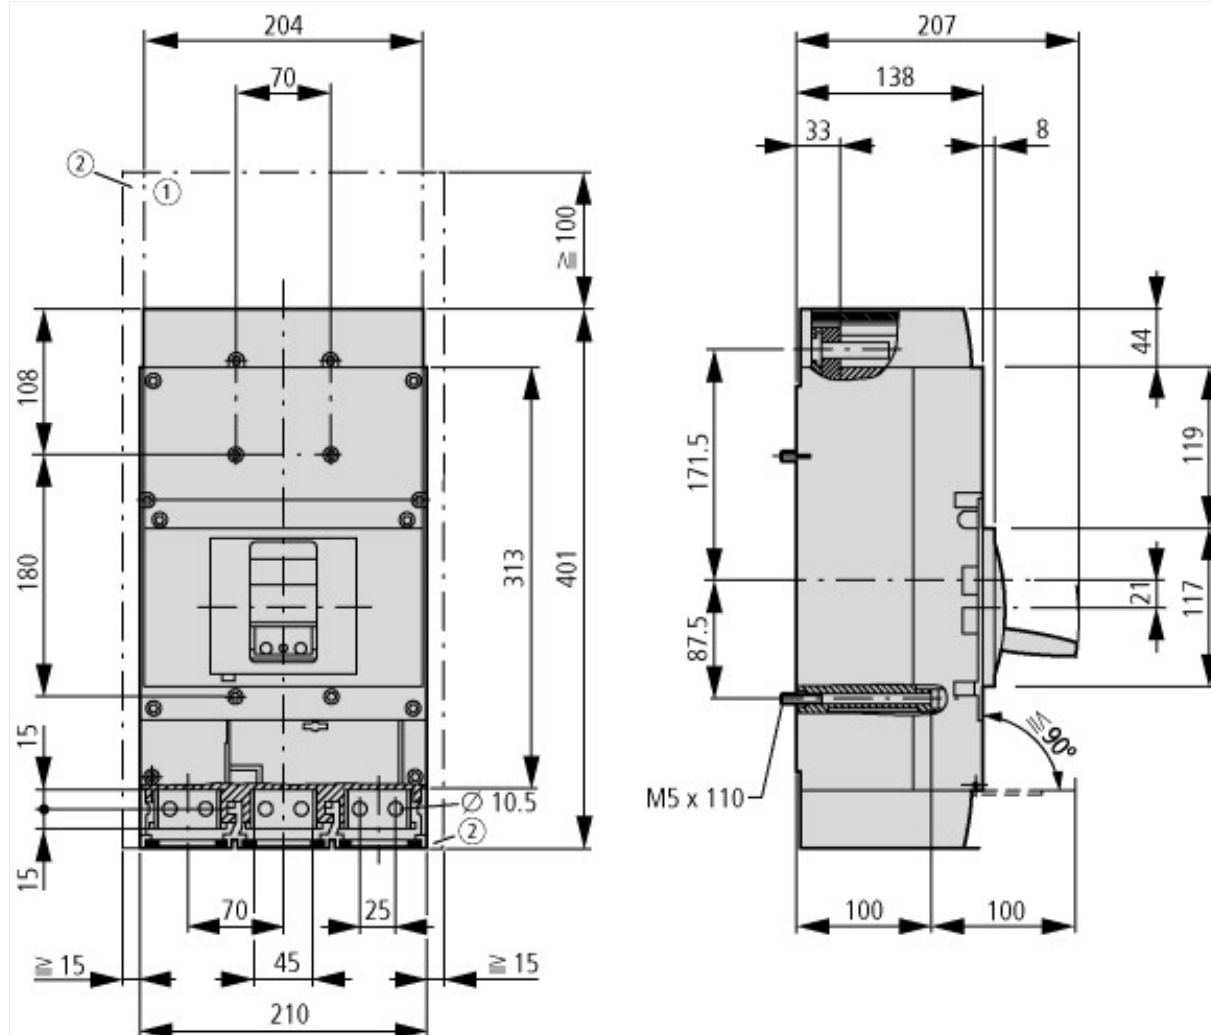

 Blow out area, minimum clearance to other parts:  
 $U_i \leq 690 \text{ V}$ : 100 mm  
 $U_i \leq 1500 \text{ V}$ : 200 mm

 Minimum clearance to adjacent parts  
 $U_i \leq 1000 \text{ V}$ : 15 mm  
 $U_i \leq 1500 \text{ V}$ : 70 mm

## Additional product information (links)

**IL01210018Z circuit-breaker LZM4, switch-disconnector LN4**

IL01210018Z circuit-breaker LZM4, switch-disconnector LN4

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL01210018Z2011\\_01.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01210018Z2011_01.pdf)