


0.5 SQ MM 1PAIR OVERALL SCREENED UNARMoured

CU/PVC/OS/PVC

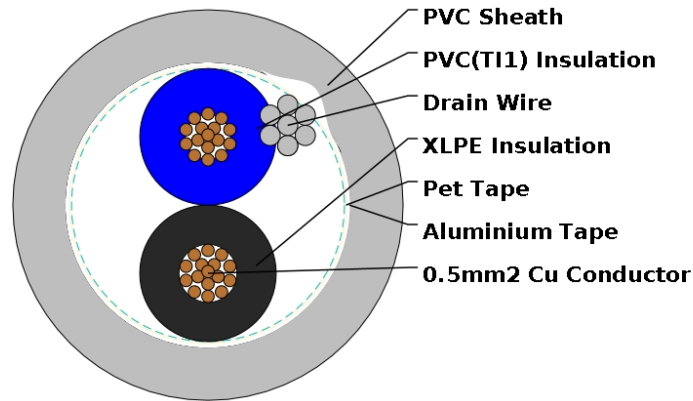

Application: The unarmoured versions (Part 2 Type 1) are generally use for indoor installation and suitable for wet and damp areas. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, also used for the interconnection of electrical equipment and instruments, typically in chemical or petrochemical industry


Conductor: Circular stranded copper wire to IEC60228, class 2

Stranding: 0.5mmsq =16/0.2 mm

Size	1 X 2X 0.5MM² CU/PVC/OS/PVC		Type: Instrumentation cable	
			Standard : BS 5308-1 & 2 EN 60332-1,60228	
Code: 1*2*0.5			METSEC CABLES LTD	
Sr.	Description	Thickness mm	Approx. Diameter mm	
	Copper size/strands		0.2/16	
	Core diameter		2.10	
	Insulation thickness	0.60		
	Polyester clear tape	0.05*20		
	Drain wire (Bare tinned copper)		0.5/7	
	Overall aluminium foil size	0.05*20		
	Sheath thickness	0.80		



TECHNICAL SPECIFICATION

DESCRIPTION	Units	Particulars offered
Voltage rating	Volts	300/500
Material of conductor	Bunched Copper	Bunched Copper
Cores copper size	No/mm	16/0.2
Insulation material		PVC Compound
Insulation thickness	mm	0.60
Cores diameter	mm	-
Cores identification Colour codes		
Conductor Resistance at 20°c	Ω/Km	12.3
Number of Pair	No.	1 Pair
Polyester clear tape	mm	0.05*20
Drain wire (tinned copper)	No/mm	7/0.5
Aluminium foil	mm	0.05*20
Inner sheath bedding material		PVC Compound
Sheath thickness	mm	0.80
Sheathing material		PVC Compound
Outer sheath colour		Grey
Approximately Overall Diameter	mm	6.00
Approximately cable weight	Kg/km	34.1
Standard cable length	M	1000 ± 5 %
Marking	Printed	AS PER CUSTOMER'S REQUEST
Packing details		Rewinded in wooden drum to protect the cable from any mechanical damage

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

