


0.75 SQ MM 4PAIR OVERALL SCREENED UNARMoured

CU/PVC/OS/PVC

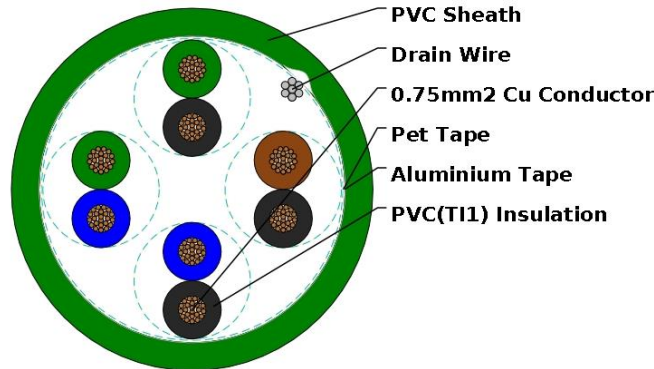

- Application:** The unarmoured versions (Part 2 Type 1) are generally use for indoor installation and suitable for wet and damp areas. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, also used for the interconnection of electrical equipment and instruments, typically in chemical or petrochemical industry
- Conductor:** Circular stranded copper wire to IEC60228, class 2
- Stranding:** 0.75mmsq =24/0.2 mm

Size	4 X 2X 0.75MM² CU/PVC/OS/PVC	Type: Instrumentation cable	
		Standard : BS 5308-1 & 2 EN 60332-1,60228	
Code: 4*2*0.75		METSEC CABLES LTD	
Sr.	Description	Thickness mm	Approx. Diameter mm
	Copper size/strands		0.2/24
	Core diameter		2.30
	Insulation thickness	0.60	
	Polyester clear tape	0.05*20	
	Drain wire (Bare tinned copper)		0.5/7
	Overall aluminium foil size	0.05*20	
	Sheath thickness	0.80	



TECHNICAL SPECIFICATION

DESCRIPTION	Units	Particulars offered								
Voltage rating	Volts	300/500								
Material of conductor	Bunched Copper	Bunched Copper								
Cores copper size	No/mm	0.2/24								
Insulation material		PVC Compound								
Insulation thickness	mm	0.60								
Cores diameter	mm	2.30								
Cores identification Colour codes		<table border="1"> <tr> <td>Black</td> <td>Blue</td> </tr> <tr> <td>Black</td> <td>Green</td> </tr> <tr> <td>Blue</td> <td>Green</td> </tr> <tr> <td>Black</td> <td>Brown</td> </tr> </table>	Black	Blue	Black	Green	Blue	Green	Black	Brown
Black	Blue									
Black	Green									
Blue	Green									
Black	Brown									
Conductor Resistance at 20°c	Ω/Km	12.3								
Number of Pair	No.	4 Pair								
Polyester clear tape	mm	0.05*20								
Drain wire (tinned copper)	No/mm	7/0.5								
Aluminium foil	mm	0.05*20								
Sheath thickness	mm	0.80								
Sheathing material		PVC Compound								
Outer sheath colour		Green								
Approximately Overall Diameter	mm	13.75								
Approximately cable weight	Kg/km	79.20								
Standard cable length	M	1000 ± 5 %								
Marking	Printed	AS PER CUSTOMER'S REQUEST								
Packing details		Rewinded in wooden drum to protect the cable from any mechanical damage								

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

