


1.5 SQ MM 8 PAIR INDIVIDUAL & OVERALL SCREENED ARMoured
CU/XLPE/IS /OS/LSZH/SWA/LSZH

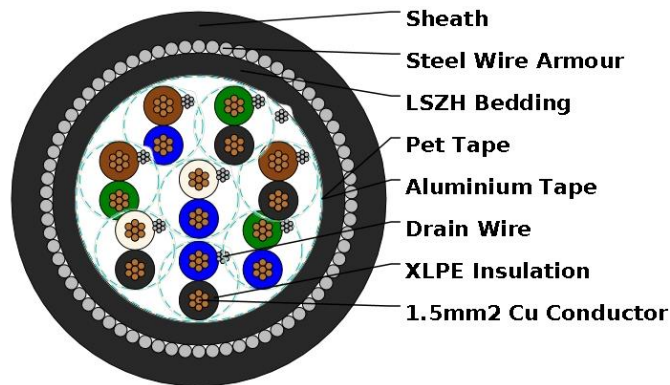

Application: The armoured LSOH versions (Part 1 Type 2) are generally used when the risk of mechanical damage is increased. The galvanised steel wire armour provides excellent protection. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, also used for the interconnection of electrical equipment and instruments, the LSOH sheath can reduce toxic smoke and fume emission.

Conductor: Circular stranded copper wire to IEC60228, class 2
Stranding: 1.5mmsq =7/0.53 mm

Size	2 X 8 X 1.5MM² CU/XLPE/IS/OS/LSZH/SWA/LSZH	Type: Instrumentation cable	
		Standard : BS 5308-1 &2 EN 60332-1,60228	
Code: 2*8*1.5		METSEC CABLES LTD	
Sr.	Description	Thickness mm	Approx. Diameter mm
	Copper size/strands		0.53/7
	Core diameter		3.10
	Insulation thickness	0.70	
	Polyester clear tape	0.05*20	
	Drain wire (Bare tinned copper)		0.5/7
	Overall aluminium foil size	0.05*20	
	Extruded thickness	1.50	
	Armour wire size		1.60
	Sheath thickness	1.90	



TECHNICAL SPECIFICATION

DESCRIPTION	Units	Particulars offered																
Voltage rating	Volts	300/500																
Material of conductor	Stranded Copper	Stranded Copper																
Cores copper size	No/mm	7/0.53																
Insulation material		XLPE compound																
Insulation thickness	mm	0.70																
Cores diameter	mm	3.10																
Cores identification Colour codes		<table border="1"> <tr><td>Black</td><td>Blue</td></tr> <tr><td>Black</td><td>Green</td></tr> <tr><td>Blue</td><td>Green</td></tr> <tr><td>Black</td><td>Brown</td></tr> <tr><td>Blue</td><td>Brown</td></tr> <tr><td>Green</td><td>Brown</td></tr> <tr><td>Black</td><td>White</td></tr> <tr><td>Blue</td><td>White</td></tr> </table>	Black	Blue	Black	Green	Blue	Green	Black	Brown	Blue	Brown	Green	Brown	Black	White	Blue	White
Black	Blue																	
Black	Green																	
Blue	Green																	
Black	Brown																	
Blue	Brown																	
Green	Brown																	
Black	White																	
Blue	White																	
Conductor Resistance at 20°c	Ω/Km	12.3																
Number of Pair	No.	8 Pairs																
Polyester clear tape	mm	0.05*20																
Drain wire (tinned copper)	No/mm	7/0.5																
Aluminium foil	mm	0.05*20																
Inner sheath bedding material		Thermoplastic LSZH																
Extruded bedding thickness	mm	1.50																
Armour wire	mm	1.60																
Sheath thickness	mm	1.90																
Sheathing material		Thermoplastic LSZH																
Outer sheath colour		Black																
Approximately Overall Diameter	mm	25.84																
Approximately cable weight	Kg/km	931.47																
Standard cable length	M	1000 ± 5 %																
Marking	Printed	AS PER CUSTOMER'S REQUEST																
Packing details		Rewinded in wooden drum to protect the cable from any mechanical damage																

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

