


1.5 SQ MM 18 PAIR INDIVIDUAL & OVERALL SCREENED ARMoured CU/XLPE/IS /OS/LSZH/SWA/LSZH

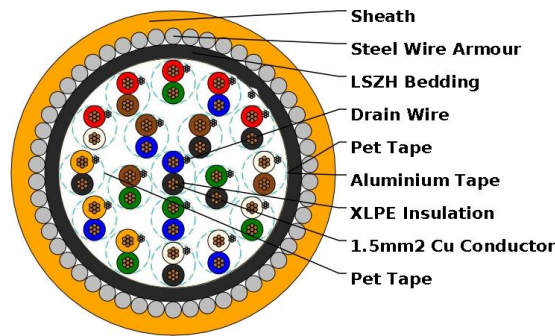

Application: The armoured LSOH versions (Part 1 Type 2) are generally used when the risk of mechanical damage is increased. The galvanised steel wire armour provides excellent protection. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, also used for the interconnection of electrical equipment and instruments, the LSOH sheath can reduce toxic smoke and fume emission.

Conductor: Circular stranded copper wire to IEC60228, class 2

Stranding: 1.5mmsq =7/0.53 mm

Size	2 X 18 X 1.5MM² CU/XLPE/IS/OS/LSZH/SWA/LSZH	Type: Instrumentation cable	
		Standard : BS 5308-1 & 2 EN 60332-1,60228	
Code: 2*18*1.5		METSEC CABLES LTD	
Sr.	Description	Thickness mm	Approx. Diameter mm
	Copper size/strands		0.53/7
	Core diameter		3.10
	Insulation thickness	0.70	
	Polyester clear tape	0.05*20	
	Drain wire (Bare tinned copper)		0.5/7
	Overall aluminium foil size	0.05*20	
	Extruded thickness	1.70	
	Armour wire size		2.00
	Sheath thickness	2.10	



Scan QR Code

TECHNICAL SPECIFICATION

DESCRIPTION	Units	Particulars offered																																				
Voltage rating	Volts	300/500																																				
Material of conductor	Stranded Copper	Stranded Copper																																				
Cores copper size	No/mm	7/0.53																																				
Insulation material		XLPE compound																																				
Insulation thickness	mm	0.70																																				
Cores diameter	mm	3.10																																				
Cores identification Colour codes		<table border="1"> <tbody> <tr><td>Black</td><td>Blue</td></tr> <tr><td>Black</td><td>Green</td></tr> <tr><td>Blue</td><td>Green</td></tr> <tr><td>Black</td><td>Brown</td></tr> <tr><td>Blue</td><td>Brown</td></tr> <tr><td>Green</td><td>Brown</td></tr> <tr><td>Black</td><td>White</td></tr> <tr><td>Blue</td><td>White</td></tr> <tr><td>Green</td><td>White</td></tr> <tr><td>Brown</td><td>White</td></tr> <tr><td>Black</td><td>Red</td></tr> <tr><td>Blue</td><td>Red</td></tr> <tr><td>Green</td><td>Red</td></tr> <tr><td>Brown</td><td>Red</td></tr> <tr><td>White</td><td>Red</td></tr> <tr><td>Black</td><td>Orange</td></tr> <tr><td>Blue</td><td>Orange</td></tr> <tr><td>Green</td><td>Orange</td></tr> </tbody> </table>	Black	Blue	Black	Green	Blue	Green	Black	Brown	Blue	Brown	Green	Brown	Black	White	Blue	White	Green	White	Brown	White	Black	Red	Blue	Red	Green	Red	Brown	Red	White	Red	Black	Orange	Blue	Orange	Green	Orange
Black	Blue																																					
Black	Green																																					
Blue	Green																																					
Black	Brown																																					
Blue	Brown																																					
Green	Brown																																					
Black	White																																					
Blue	White																																					
Green	White																																					
Brown	White																																					
Black	Red																																					
Blue	Red																																					
Green	Red																																					
Brown	Red																																					
White	Red																																					
Black	Orange																																					
Blue	Orange																																					
Green	Orange																																					
Conductor Resistance at 20°c	Ω/Km	12.3																																				
Number of Pair	No.	18 Pairs																																				
Polyester clear tape	mm	0.05*20																																				
Drain wire (tinned copper)	No/mm	7/0.5																																				
Aluminium foil	mm	0.05*20																																				
Inner sheath bedding material		Thermoplastic LSZH																																				
Extruded bedding thickness	mm	1.70																																				
Armour wire	mm	2.00																																				
Sheath thickness	mm	2.10																																				
Sheathing material		Thermoplastic LSZH																																				
Outer sheath colour		Orange																																				
Approximately Overall Diameter	mm	36.50																																				
Approximately cable weight	Kg/km	1366.18																																				
Standard cable length	M	1000 ± 5 %																																				
Marking	Printed	AS PER CUSTOMER'S REQUEST																																				
Packing details		Rewinded in wooden drum to protect the cable from any mechanical damage																																				

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

