

## SAMBROOK FOOT AND FLANGE MOTORS 415V 50Hz IP55




**APPLICATIONS:** General purpose including cutting machines, pumps, fans Conveyors, machines tools of farm duty and food process.

**FEATURES:** Insulation class: F; Ingress Protection class: IP55

**CIRCUMSTANCE FOR USE:** The ambient temperature subject to seasonal variations but not exceeding +40°C and not less than - 15°C

Stock Code	Type	KW	HP	Current A	r/min	Locked rotor torque	Locked rotor current Rated Current	Breakdown torque Rated torque
EKSMOTORY43075A=	Y2-132S-4-B35	5.5	7.5	11.6	1440	2.2	7.0	2.3
EKSMOTORY43100A=	Y2-132M-4-B35	7.5	10	15.4	1440	2.2	7.0	2.3



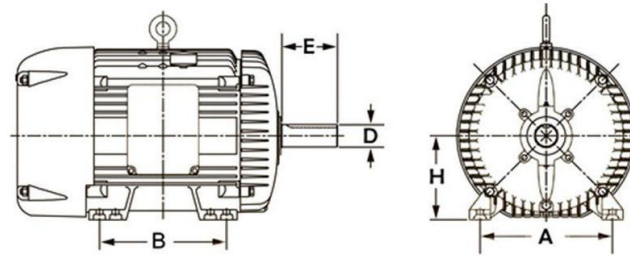

### IEC MOTOR FRAME CHART

Frame Size	A	B	H	D	E
	mm	mm	mm	mm	mm
63	100	80	63	11	23
71	112	90	71	14	30
80	125	100	80	19	40
90S	140	100	90	24	50
90L		125			
100S	160	112	100	28	60
100L		140			
112S	190	114	112	28	60
112M		140			
132S	216	140	132	38	80
132M		178			
160M	254	210	160	42	110
160L		254			
180M	279	241	180	48	110
180L		279			
200L	318	267	200	55	110
200M		305			
225S	356	286	225	60	140
225M		311			
250S	406	311	250	70	140
250M		349			
280S	457	368	280	80	170
280M		419			
315S	508	406	315	85	170
315M		457			
355S	610	500	355	85	170
355L		630			

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

