## **Product Data Sheet**



Product Code	Issue Number	Issue Date	Issue Reference
	1	04/07/21	MET008

**Product Description** 

## **uPVC MINI TRUNKING**


## **Features**


Full range of accessories to compliment including angles, couplers, tees, moulded & painted colour finishes and more.

Moulded or fabricated accessory options.

Firm locking action defies accidental removal.

Compliance	BS 476 Part 7, BS 4678 Part 4
Material	uPVC – Flame Retardant
Finish	White (Standard)
Supplied Length	2.9 Metres
Size	24 x 14 mm



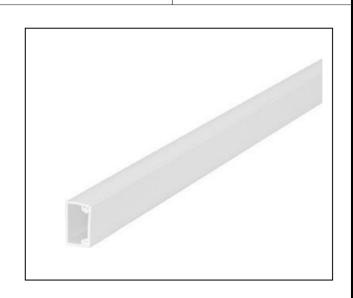

Environmental Information	Packaging Waste: Outer Bag — 0.0034Kg /LDPE ROHS Compliant ref: 2011/65/EU uPVC Products are insoluble in water and will not degrade when buried in landfills etc. The products manufactured and otherwise supplied by thecompany do not have any perceived or known hazardous materials or by-products that would be deemed hazardous to the environment.
Hazards Identification	No specific hazards as the ingredients are bound into the uPVC matrix and are thus rendered virtually insoluble.
Softening Point	(Extrusions) 82°C BS 2782 Method 120B.

Any trunking with a space factor equal to or larger than that of the cable factors will satisfactorily accommodate the desired cables

## **Thermal Properties**

Metsec uPVC trunking systems are designed to accommodate local thermal expansion and contraction. The coefficient of linear expansion: 7.0 x 10 -5°C to 60°C.

