

# GU10 5W LED Lamp





## Applications:

- Residences
- Restaurants
- Hotel Rooms / Bathrooms
- Modern Gyms / Spa
- Corporate Offices

LED lamp with low power consumption, long life, good stability, and high reliability.

CCT 3000K 4000K 6000K

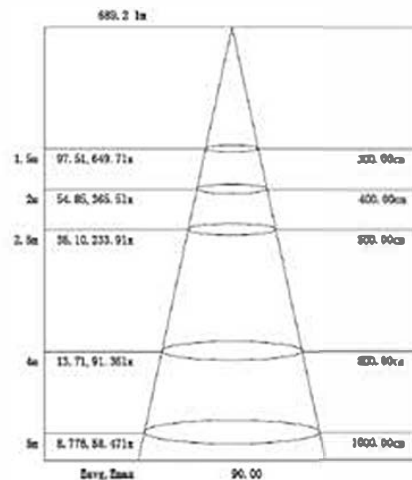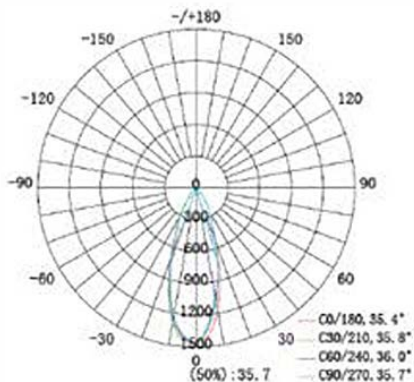

## Technical Parameters

|                            | Parameter                      | Unit | Nom                     | Max                        | Min  |
|----------------------------|--------------------------------|------|-------------------------|----------------------------|------|
| Electrical characteristics | 1 Rated Wattage                | W    | ~                       | 5.5                        | 4.5  |
|                            | 2 Rated Voltage                | V/HZ | AC 220-240V<br>50/60HZ  | 240                        | 100  |
|                            | 3 Power Factor                 |      | 0.6                     | --                         | --   |
|                            | 4 Driver Input current         | mA   | 130mA 120V<br>80mA 230V | --                         | --   |
| Photoelectric Parameter    | 5 Luminous flux (lm)           | lm   | 450                     | --                         | --   |
|                            | 6 Lumen efficiency(Rated)      | lm/W | 91.46                   | --                         | --   |
|                            | 7 Type and number LED          | pcs  | 2835 5PCS               | --                         | --   |
|                            | 8 Beam angle                   | °    | 60                      | 65                         | 55   |
|                            | 9 3000hours Lumen Maintenance  | %    | 92                      | --                         | --   |
|                            | 10 CCT                         | K    | Option                  | 6500                       | 2700 |
|                            | 11 Colour rendering index (Ra) |      | ≥80                     | --                         | 80   |
| Other                      | 12 Rated life(L70)             | hrs  | 25000                   | --                         | --   |
|                            | 13 Diameter                    | mm   | 50mm                    | 51                         | 49   |
|                            | 13 Height H                    | mm   | 56mm                    | 57                         | 55   |
|                            | 14 Hole size                   | mm   | --                      | --                         | --   |
|                            | 15 Base                        |      | GU10                    | --                         | --   |
|                            | 16 Weight                      | g    | 33                      | --                         | --   |
|                            | 17 Dielectric strength         | V    | 4000                    | --                         | 4000 |
|                            | 18 Electric shock proof grade  |      |                         | --                         | --   |
|                            | 19 Dimmable (Y/N)              |      |                         | N                          |      |
|                            | 20 CE(Y/N)                     |      |                         | Y                          |      |
|                            | 21 Work environment            |      |                         | -20% ~ +40% 10% ~ 80% R.H. |      |
|                            | 22 Storage environment         |      |                         | -20% ~ +50% 0% ~ 80% R.H.  |      |
|                            | 23 Protection grade            |      |                         | IP20                       |      |
| 24 Installation mode       |                                |      | Recessed                |                            |      |