


## Characteristics

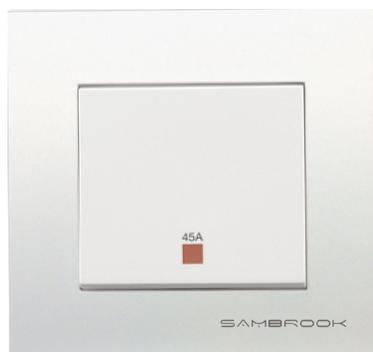

Main	
Range	SAMBROOK
Device short name	V327
Actuator	Rocker
Product or Component type	Switch
Device presentation	Complete mechanism
Colour tint	White
Complementary	
Switch function	Double 1- way
Control type	Rocker
Pilot light	Neon indicator lamp
Number of gangs	2 gangs
Rated current	45 A at 250 V AC, inductive; 45 A at 250 V AC, resistive
Projecting depth	8 mm
Material	Polycarbonate: grid plate, Polycarbonate: surround, Polycarbonate: base
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	47 mm
[Ue] rated operational voltage	250 V AC
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Environment	
Standards	MS IEC 60669-1, SS 227
Environmental characteristics	Indoor use