


EARTH ROD CLAMP



APPLICATION

These clamps are used for joining earth rods to different sizes of stranded copper conductor. The clamps have a high resistance to corrosion and are mechanically strong to ensure a lasting connection.

Earth Rod Shank Ø mm	Conductor Range mm ²	L mm	W mm	H mm	Unit Weight kg
9.5	6 - 35	32	20	16	0.04
12.7	6 - 35	34	25	15	0.05
	35 - 70	41	25	17	0.08
14.2	6 - 16	34	25	15	0.05
	16 - 70	41	25	17	0.08
	70 - 185	48	30	19	0.10
15.0	6 - 16	34	25	15	0.05
	16 - 70	41	25	17	0.08
	70 - 150	48	30	19	0.10
16.0	6 - 70	41	25	17	0.08
	70 - 120	48	30	19	0.10
17.2	6 - 95	48	30	19	0.10
20.0	6 - 70	48	30	19	0.10

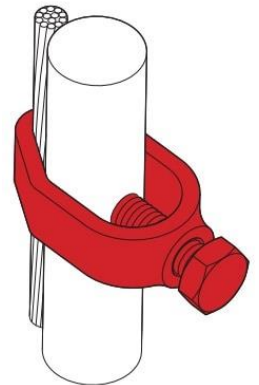

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

