


PNEUMATIC FITTINGS

Straight Threaded Valve (Run Tee)

These Push to Connect, “push in” fittings are used to connect pneumatic tubing, such as polyurethane and nylon, to various control-valves, cylinders and other associated equipment. These fitting allows tubing to be connected and reconnected repeatedly without damaging the tube or fitting.

Technical information:

- Fluid: Air, Vacuum
- Pressure range:0~1MPa (0~150PSI)
- Temperature range:0~60°C
- Material: Plastic
- Release ring color: Blue
- Applicable tube: PU(Polyurethane), PA(Nylon)

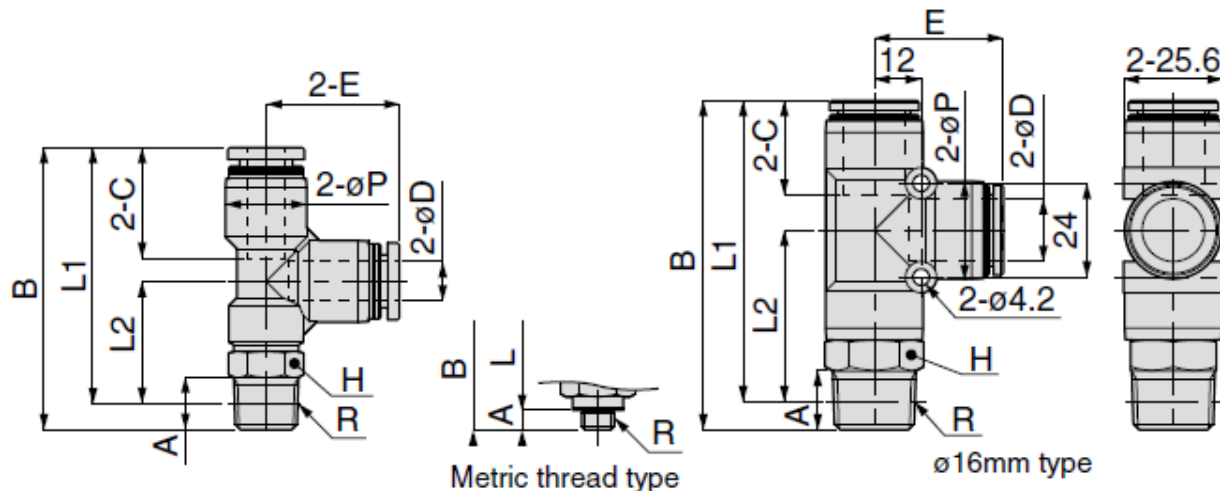

Model code	Tube O.D. øD	R	A	B	L1	L2	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)		
PD4-M5 ④	4	M5 × 0.8	2.8 [3]	33.7	30.9 [30.7]	13.7 [13.5]	10	14.9	17.2	8	2.4	7.8		
PD4-M6 ④		M6 × 1	3.8	38.2	34.4	17.2				10	2.8	11		
PD4-01 ④		R1/8	8	40.2	36.2	19			2.8	13				
PD4-02 ④		R1/4	11	46.2	40.2	23				20				
PD6-M5 ④	6	M5 × 0.8	2.8 [3]	40.3	37.5 [37.3]	17 [16.8]	12.5	17	20.5	10	2.4	12		
PD6-M6 ④		M6 × 1	3.8	41.3	37.5	17				3	14		14	4.3
PD6-01 ④		R1/8	8	43.3	39.3	18.8				4.3	14	22		
PD6-02 ④		R1/4	11	48.8	42.7	22.2			17		32			
PD6-03 ④		R3/8	12	52	45.7	25.2			21.5	17	32			
PD8-01 ④*	8	R1/8	8	46.9	42.9	20	14.5	18.1	22.9	12	6	19		
PD8-02 ④*		R1/4	11	51.7	45.7	22.8				14	6.7	25		
PD8-03 ④*		R3/8	12	55.4	49.1	26.2				17	35			
PD10-01 ④	10	R1/8	8	51.2	47.2	21	17.5	20.2	25.5	12	6	25		
PD10-02 ④*		R1/4	11	54.7	48.7	22.5			14	8	31			
PD10-03 ④*		R3/8	12	58.2	51.9	25.7			17	8.3	42			
PD10-04 ④		R1/2	15	62.2	54	27.8			27.3		21	65		
PD12-02 ④	12	R1/4	11	60.3	54.2	23.7	21	23.4	30	14	8	38		
PD12-03 ④		R3/8	12	63.5	57.2	26.7			30.5	17	10	48		
PD12-04 ④		R1/2	15	67.5	59.3	28.8			30.7	21	10.3	72		
PD16-03 ④	16	R3/8	11	80.1	73.8	40.7	25	24.1	33.1	22	11	89		
PD16-04 ④		R1/2	15	84.1	75.9	42.8					13	93		

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale

