


# FIBER OPTIC HYBRID PATCHCORD, Simplex/Duplex, 0.9mm, SM, SC/UPC to SC/UPC, Yellow LSZH

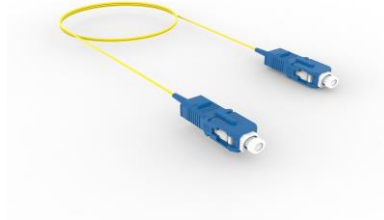

Product Classification	
Product Type	Fiber patch cord, simplex/ Duplex

General Specifications	
Color, boot A	Blue
Color, boot B	Blue
Color, connector A	Blue
Color, connector B	Blue
Connector A, quantity	1
Connector B, quantity	1
Interface, Connector A	SC/UPC
Interface, Connector B	SC/UPC
Jacket Color	Yellow
Total Fibers, quantity	1

Dimensions	
Diameter Over Jacket	0.9 mm   0.035 in

Mechanical Specifications	
Cable Retention Strength, maximum	1.00 lb @ 0°   1.00 lb @ 90°



SCAN QR CODE

Optical Specifications	
Fiber Mode	Single mode
Fiber Type	G.657.A1, TeraSPEED®
Insertion Loss, maximum	0.3 Db
Return Loss, minimum	50 dB

Environmental Specifications	
Operating Temperature	-20 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Low Smoke Zero Halogen (LSZH)

Packaging and Weight	
Packaging quantity	1

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for products set forth our standard terms and conditions of sale



SCAN QR CODE