


## Geberit HDPE Sovent fitting



Example image

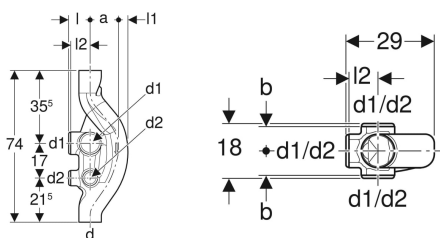

### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)

### Characteristics

- Six connection options, closed

- UV-resistant
- With SuperTube technology

### Technical data

|                        |        |
|------------------------|--------|
| Maximum discharge rate | 12 l/s |
| Product material       | PE-HD  |

| Art. no.     | DN             | d, ø   | d1, ø  | d2, ø | a     | l       | l1     | l2     | b    |
|--------------|----------------|--------|--------|-------|-------|---------|--------|--------|------|
| 367.614.16.1 | 100 / 100 / 70 | 110 mm | 110 mm | 75 mm | 13 cm | 10.5 cm | 5.5 cm | 9.5 cm | 8 cm |