

**DOUBLE SOCKET REDUCING**

**DOUBLE SOCKET REDUCING**  
sockets for solvent welding,  
with a reduced end

**MANCHON REDUIT**  
femelles à coller, une emboiture  
reduite d1




Fig. A

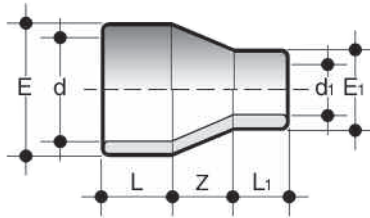


Fig. B

d x d <sub>1</sub>	PN	L	Z	E	E <sub>1</sub>	K	Fig	g
**110 x 90	16	61	4,5	-	-	130	A	555
*180 x 125	4	95	48,8	214	154	-	B	2700
*180 x 140	4	95	35,0	214	170	-	B	2700
*180 x 160	4	95	17,0	214	190	-	B	2800
*200 x 110	4	102	78,0	234	138	-	B	3100
*200 x 125	4	102	65,0	234	154	-	B	3100
*200 x 140	4	102	52,0	234	170	-	B	3200
*200 x 160	4	102	35,0	234	190	-	B	3200
*200 x 180	4	102	17,0	234	213	-	B	3300
*225 x 110	4	103	100,0	258	138	-	B	4000
*225 x 125	4	103	88,0	258	154	-	B	4000
*225 x 140	4	103	74,0	258	170	-	B	3800
*225 x 160	4	103	57,0	258	190	-	B	4000
*225 x 180	4	103	40,0	258	214	-	B	3500
*225 x 200	4	103	22,0	258	234	-	B	3500
*250 x 110	4	105	122,0	283	138	-	B	4500
*250 x 125	4	105	108,0	283	154	-	B	4700
*250 x 140	4	105	96,0	283	170	-	B	4600
*250 x 160	4	105	78,0	283	190	-	B	4700
*250 x 180	4	105	62,0	283	214	-	B	4600
*250 x 200	4	105	44,0	283	234	-	B	4500
*250 x 225	4	105	22,0	283	258	-	B	4900
*280 x 110	4	101	150,0	317	138	-	B	5400
*280 x 125	4	101	136,0	317	154	-	B	5400
*280 x 140	4	101	123,0	317	170	-	B	5400
*280 x 160	4	101	105,0	317	190	-	B	5700
*280 x 180	4	101	87,0	317	214	-	B	5700
*280 x 200	4	101	70,0	317	234	-	B	5800
*280 x 225	4	101	47,0	317	258	-	B	5500
*280 x 250	4	101	26,0	317	283	-	B	5400
*315 x 160	4	105	135,0	355	190	-	B	6400
*315 x 180	4	105	117,0	355	214	-	B	6600
*315 x 200	4	105	100,0	355	234	-	B	6800
*315 x 225	4	105	79,0	355	258	-	B	7200
*315 x 250	4	105	57,0	355	283	-	B	6800
*315 x 280	4	105	31,0	355	317	-	B	7100
*355 x 315	4	105	35,0	394	355	-	B	7500
*400 x 315	4	105	75,0	435	355	-	B	9500
*400 x 355	4	105	40,0	435	394	-	B	9000

\*resale product \*produit de revente  
\*\*reduced safety factor \*\*facteur de securité réduit