


END CAP

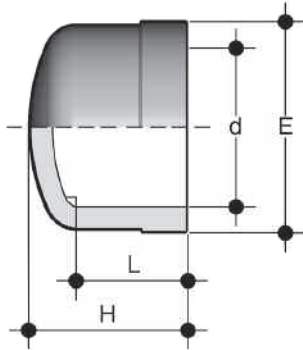

END CAP
socket for solvent welding

BOUCHON
femelle à coller

d	L	H	E	g
1/2	16,5	22,5	27,7	7,5
3/4	19,5	27,0	33,8	12,0
1	22,5	31,0	41,8	21,0
1 1/4	27,0	36,0	50,9	30,0
1 1/2	31,0	43,0	61,9	65,0
2	38,0	52,0	77,0	120,0
2 1/2	44,0	59,0	91,2	205,0
3	51,0	69,0	110,2	320,0
4	63,5	82,0	132,4	450,0

d	PN	L	H	E	g
12	16	12	15	17	3
16	16	15	17	21	4
20	16	16	23	28	9
25	16	19	27	34	15
32	16	22	31	41	25
40	16	26	36	51	40
50	16	31	43	62	60
63	16	38	51	77	110
75	16	44	59	91	190
90	16	51	69	110	330
110	16	61	85	133	575
125	16	69	99	147	900
140	16	76	108	164	1100
160	16	86	128	192	1900
225	10	119	163	260	3000